


## FM-200® FIRE SUPPRESSION SYSTEM

## **DATA SHEET**

## 3 IN. (76 mm) DISCHARGE HOSE/ SINGLE TANK ADAPTORS

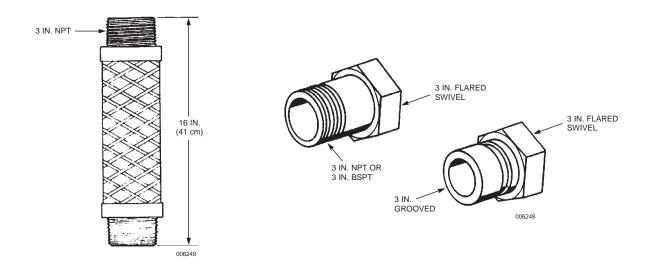

Discharge Hose - Part No. 69990

**Specification:** Hose Construction: . . . . . . . . Corrugated stainless steel tubing

with stainless braid cover

Connection: . . . . . . . . . . . . . . . 3 in. NPT

Max. Working Pressure: . . . . . . . 500 psi (35 bar)

Min. Burst Pressure: . . . . . . . . . 2000 psi (138 bar)

**Single Tank Adaptors** 

Part No. 69470 – 3 in. Flared to 3 in. NPT Part No. 69471 – 3 in. Flared to 3 in. Grooved Part No. 570363 – 3 in. Flared to 3 in. BSPT

Swivel Nut: . . . . . . . . . . . . . . . Brass

Swivel Ball: . . . . . . . . . Stainless steel